

# RL4107 transmitter

## Pro RL4000RH/T Series

Part of the **Hanwell Pro** RL4000RHT Series, the RL4107 combines temperature and humidity measurement using onboard sensors with the option of connecting a flood probe. The instrument includes LCD display and 434.075MHz frequency as standard.

### Features

- ✓ Combined temperature & humidity measurement
- ✓ Damp & leak detection
- ✓ LCD display with 50,000 data readings per channel & up to 2 years battery life
- ✓ Superior performance hardware & high accuracy sensors
- ✓ Easily accessible battery & USB socket
- ✓ Low power radio for long distance transmission (3km over open ground)
- ✓ Complies with RoHS, EU & WEEE directives
- ✓ Carries CE Marking


### Typical Applications

- Dry storage
- Ambient room conditions
- Damp & leak detection

Always ask for a long-range signal strength test.



We can prove ours to be unrivalled.

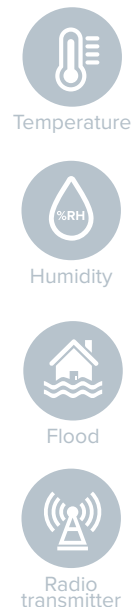

Product code: RL4107-434.075

### Instrumentation specification

Dimension (Excl. ancillaries)	110 x 80 x 35mm
Weight	200 grams
Power supply	1 x 3.6V AA Lithium battery
Battery life	Up to 2 years (dependent on conditions of use and instrument settings)
Case material	ABS & PC
Memory capacity	50,000 readings per channel (unit will wrap when full)
Clock accuracy (logging)	20 ppm at 25°C
IP Rating	IP30
Instrument measuring range	-20°C to +60°C
Instrument operating range	-20°C to +60°C in a non-condensing RH environment
Instrument storage temperature	-40°C to +60°C
Resolution	0.1°C (temp), 0.1%RH (humidity)

Note: RH and T only recorded on internal logging, not flood

### Radio transmitter functions

Frequency options	A range of frequencies are available between 433-458MHz. Country specific regulations apply.
Radio power	10mW
Radio range	3km over open ground
Software required	W900 – Standard EMS Software Package W906 – Validated EMS Software Package *See EMS datasheet for further options
Software compatibility	<b>EMS</b> - All Versions <b>Synergy</b> - All Versions <b>RadioLog 8</b>
Hardware required	CR2 / CR3 – Controller SR2 – Smart Receiver REP – Repeater

Manufactured by Hanwell | Ellab   RoHS

Version 6 - EC200116

**Disclaimer:** The information contained herein is believed to be reliable. Hanwell Solutions Ltd. is not responsible for any incorrect or incomplete information on this datasheet and the information or product may be changed without notice. Customers should obtain and verify the latest relevant information before placing orders for Hanwell products.

hanwell.com

Tel: +44 (0)1462 688070 | Email: sales@hanwell.com

# Sensors supplied with unit

## Product codes

88706	AA Lithium battery
Y119	Wall mounting bracket
Probe options	<a href="#">Please refer to the Hanwell Pro Sensor datasheet</a>

## Internal temperature sensor Precision Thermistor

Operating range	-20°C to +60°C (restricted by instrument operating range)
Accuracy	+/- 0.3°
Long term drift	< 0.1°C per year

## Fixed relative humidity sensor Capacitive Polymer

Operating range	10-90% RH non condensing
Accuracy	+/- 3% RH
Temperature dependence	$<(0.025+0.0003 \times RH)[\%RH/^{\circ}C]$

